



**600x  
1200mm**

®

**PASSION**  
WALL & VITRIFIED



GVT / PGVT



42314



42315



600x  
1200mm

GLOSSY FINISH





GVT / PGVT



42316



42317



600x  
1200mm

GLOSSY FINISH





GVT / PGVT



42318



42319



600x  
1200mm

GLOSSY FINISH





GVT / PGVT



42320



42321



600x  
1200mm

GLOSSY FINISH





GVT / PGVT



42322



42323



600x  
1200mm

GLOSSY FINISH






GVT / PGVT



42324

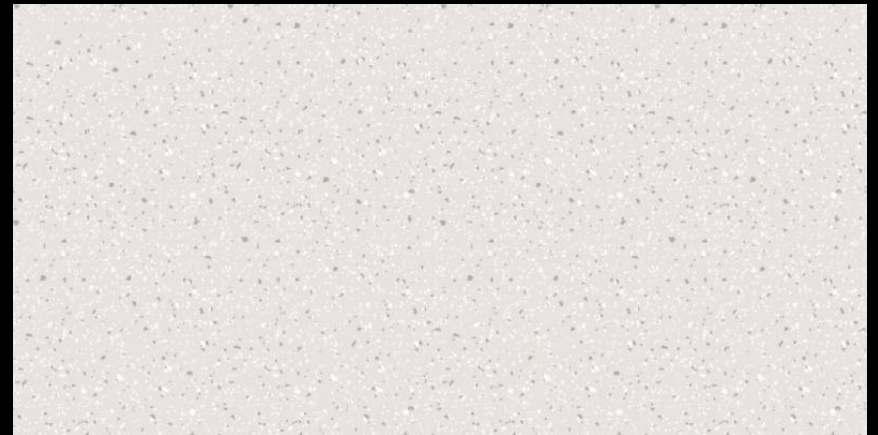

42325



600x  
1200mm

GLOSSY FINISH







GVT / PGVT



42326



42327

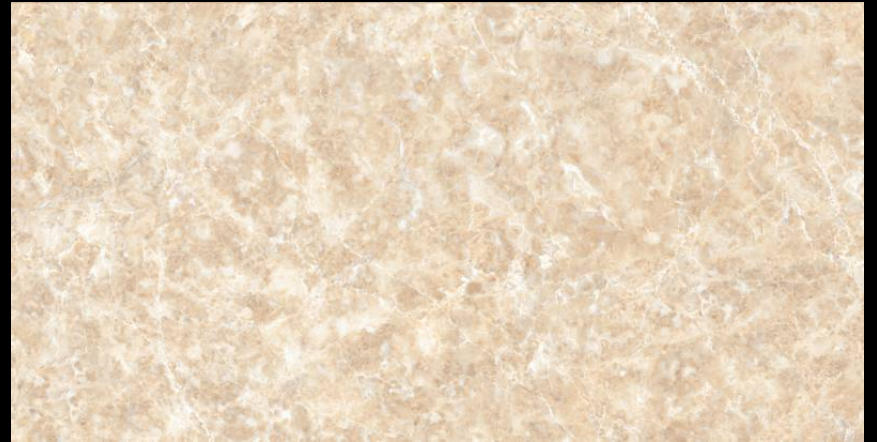

GLOSSY FINISH








GVT / PGVT



42328



42329

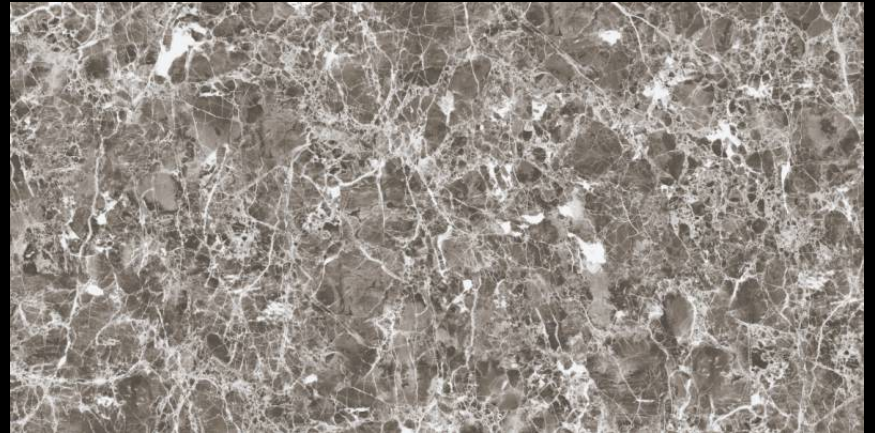

600x  
1200mm

GLOSSY FINISH





GVT / PGVT



42330



42331



600x  
1200mm

GLOSSY FINISH





GVT / PGVT



42332



42333



600x  
1200mm

GLOSSY FINISH



High Strength



Eco Friendly



Random Design



Low Maintenance



GVT / PGVT



42334



42335



600x  
1200mm

GLOSSY FINISH





GVT / PGVT



42336



42337



600x  
1200mm

GLOSSY FINISH



High Strength



Eco Friendly



Random Design



Low Maintenance



GVT / PGVT



42338



42339



600x  
1200mm

GLOSSY FINISH






GVT / PGVT




42340



42341



GLOSSY FINISH





GVT / PGVT



42342



42343



600x  
1200mm

GLOSSY FINISH







GVT / PGVT



42344



42345



600x  
1200mm

GLOSSY FINISH





GVT / PGVT



42346



42347



600x  
1200mm

GLOSSY FINISH



High  
Strength



Eco  
Friendly



Random  
Design



Low  
Maintenance



GVT / PGVT



42348



42349



600x  
1200mm

GLOSSY FINISH





GVT / PGVT



42350



42351



600x  
1200mm

GLOSSY FINISH






GVT / PGVT



42352



42353



GLOSSY FINISH





GVT / PGVT



42354



42355



600x  
1200mm

GLOSSY FINISH






GVT / PGVT




42356



42357



GLOSSY FINISH





GVT / PGVT



42358



42359



600x  
1200mm

GLOSSY FINISH







GVT / PGVT



42360



42361



600x  
1200mm

GLOSSY FINISH





GVT / PGVT



42362



42363



600x  
1200mm

GLOSSY FINISH






GVT / PGVT



42364



42365

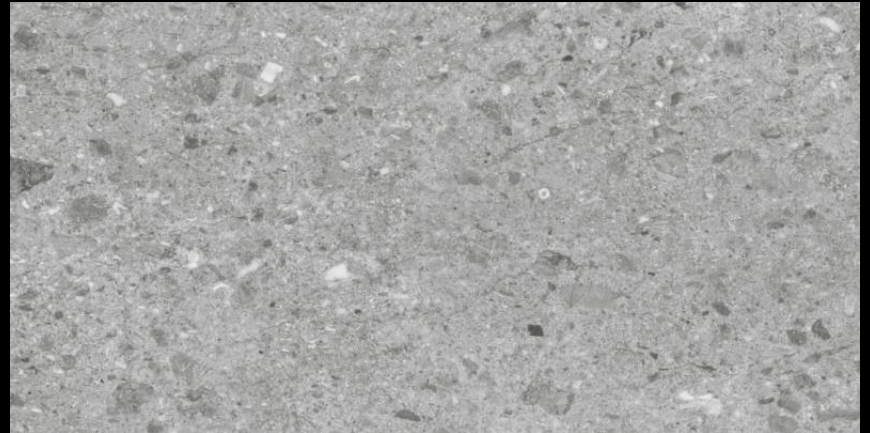

600x  
1200mm

GLOSSY FINISH






GVT / PGVT



42366



42367



GLOSSY FINISH





GVT / PGVT



42368



42369



600x  
1200mm

GLOSSY FINISH





GVT / PGVT



42370



42371



600x  
1200mm

GLOSSY FINISH






GVT / PGVT



42372



42373

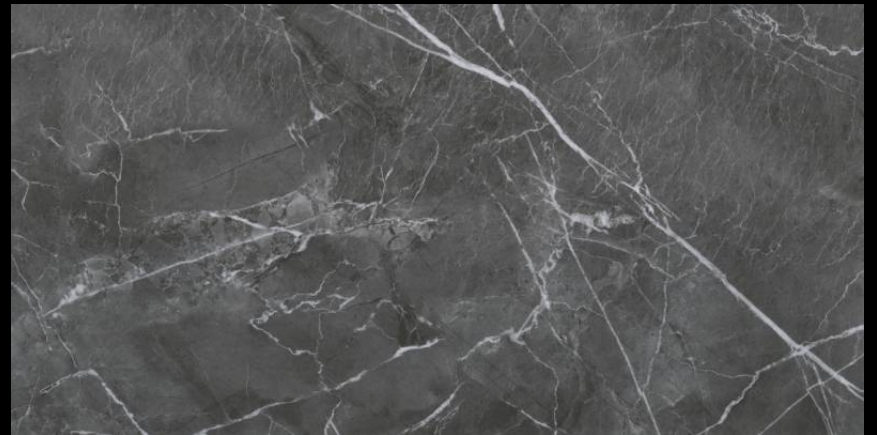

600x  
1200mm

GLOSSY FINISH





GVT / PGVT



42374



42375



600x  
1200mm

GLOSSY FINISH







GVT / PGVT



42376



42377



600x  
1200mm

GLOSSY FINISH



## TECHNICAL SPECIFICATION

CHARACTERISTIC	STANDARD AS PER ISO-13006/EN14411 GROUP BLA	MEAN VALUE OF PASSION	TEST METHOD
<b>REGULATORY PROPERTIES</b>			
Deviation in Length & Width	±0.5%	±0.1%	ISO-10545-2
Deviation in Thickness	±5.0%	±4.0%	ISO-10545-2
Straightness in Side	±0.5%	±0.1%	ISO-10545-2
Rectangularity	±0.5%	±0.1%	ISO-10545-2
Surface Flatness	±0.5%	±0.2%	ISO-10545-2
Color Difference	Unaltered	No Change	ISO-10545-16
Glossiness (ONLY FOR PGVT)	As Per Mfg.	Min 90%	GLOSSMETER
<b>STRUCTURAL PROPERTIES</b>			
Water Absorption	< 0.50%	< 0.05%	ISO-10545-3
Apparent Density	> 2.0 g/cc	> 2.10 g/cc	DIN 51082
<b>MASSIVE MECHANICAL PROPERTIES</b>			
Modulus of Rupture	Min. 35 N/mm <sup>2</sup>	Min. 40 N/mm <sup>2</sup>	ISO-10545-4
Breaking Strength	Min. 1300 N	Min. 2000 N	ISO-10545-4
Impact Resistance	As Per Mfg.	Min. 0.55	ISO-10545-5
<b>SURFACE MECHANICAL PROPERTIES</b>			
Surface Abrasion Resistance	As Per Mfg.	Min. Class-3	ISO-10545-7
MOH's Hardness	As Per Mfg.	Min. 4	EN 101
<b>THERMO HYGROMETRIC PROPERTIES</b>			
Frost Resistance	No Damage	No Damage	ISO-10545-12
Thermal Shock Resistance	No Damage	No Damage	ISO-10545-09
Moisture Expansion	Nil	Nil	ISO-10545-10
Thermal Expansion (coe)	Max. 9.0 x 10 <sup>-6</sup>	Max. 6.5 x 10 <sup>-6</sup>	ISO-10545-8
Crazing Resistance	As Per Mfg.	Min. 10 Cycle	ISO-10545-11
<b>CHEMICAL PROPERTIES</b>			
Chemical Resistance	No Damage	No Damage	ISO-10545-13
Stain Resistance	Resistance	Resistance	ISO-10545-14
<b>SAFETY PROPERTIES</b>			
Slip Resistance	As Per Mfg.	> 0.40	ISO-10545-17
Fire Resistance	As Per Mfg.	Fireproof	N. A.
Lead & Cadmium Given Off By Glazed Tiles	As Per Mfg.	Does Not Yield Pb & Cd	ISO-10545-15

## PACKING DETAILS

DIMENSION	THICKNESS	PCS/BOX	COVERAGE AREA	BOX WEIGHT
600 X 1200 MM	9 MM (APPROX)	2	1.44 SQM.	30 KG ( APPROX)

**DISCLAIMER:** We tiles reserve the right to deleted and amend either totally or partially, any of the colors, shape, sizes, references and other technical specification contained in this catalogue at anytime. The colors shown of tiles in this catalogue are purely illustrative and limited to printing process. Please refer actual sample before final selection. The details of sizes, colors, references should be verified for typographical errors.



**PASSION VITRIFIED PVT. LTD.**

Survey No. 223/P1,  
Sartanpar Road, Near Matel,  
Ta. Wankaner - 363621, Dist: Morbi, Gujarat, India.

T. - +91 99250 34828  
E. - [marketing@passiontiles.com](mailto:marketing@passiontiles.com)  
w. - [www.passiontiles.com](http://www.passiontiles.com)