

<sup>®</sup>  
**PASSION**  
WALL & VITRIFIED



GVT / PGVT



42180



600x  
1200mm

GLOSSY FINISH





GVT / PGVT



42181



600x  
1200mm

GLOSSY FINISH






GVT / PGVT



42182



600x  
1200mm

GLOSSY FINISH



High  
Strength



Eco  
Friendly



Random  
Design



Low  
Maintenance



GVT / PGVT



42183



600x  
1200mm

GLOSSY FINISH



High  
Strength



Eco  
Friendly



Random  
Design



Low  
Maintenance



GVT / PGVT



42184



600x  
1200mm

GLOSSY FINISH



High  
Strength



Eco  
Friendly



Random  
Design




Low  
Maintenance



GVT / PGVT



42185



600x  
1200mm

GLOSSY FINISH



High  
Strength



Eco  
Friendly



Random  
Design





Low  
Maintenance



GVT / PGVT



42186



600x  
1200mm

GLOSSY FINISH



High  
Strength



Eco  
Friendly



Random  
Design



Low  
Maintenance





GVT / PGVT




42187



600x  
1200mm

GLOSSY FINISH








GVT / PGVT



42188



600x  
1200mm

GLOSSY FINISH



High  
Strength



Eco  
Friendly



Random  
Design





Low  
Maintenance



GVT / PGVT




42189



600x  
1200mm

GLOSSY FINISH





GVT / PGVT



42190



600x  
1200mm

GLOSSY FINISH



High  
Strength



Eco  
Friendly



Random  
Design



Low  
Maintenance



GVT / PGVT



42191



600x  
1200mm

GLOSSY FINISH



High  
Strength



Eco  
Friendly



Random  
Design



Low  
Maintenance



GVT / PGVT




42192



600x  
1200mm

GLOSSY FINISH







GVT / PGVT



42193

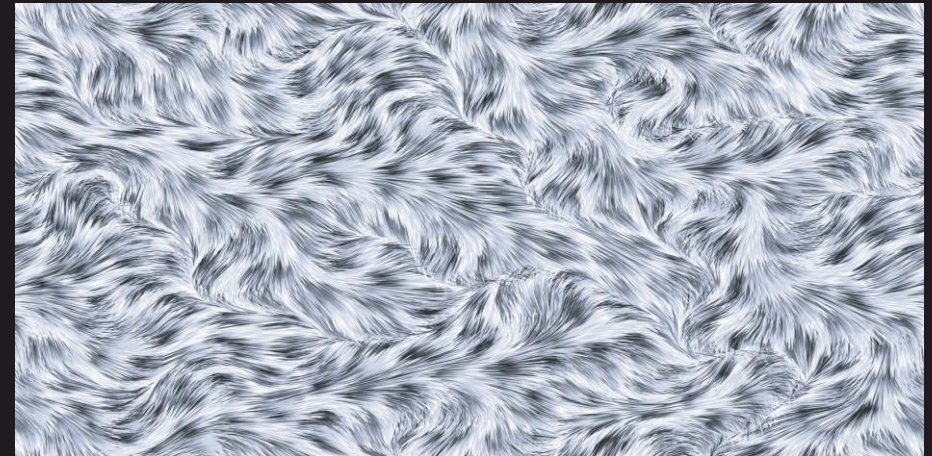

GLOSSY FINISH






GVT / PGVT




42194

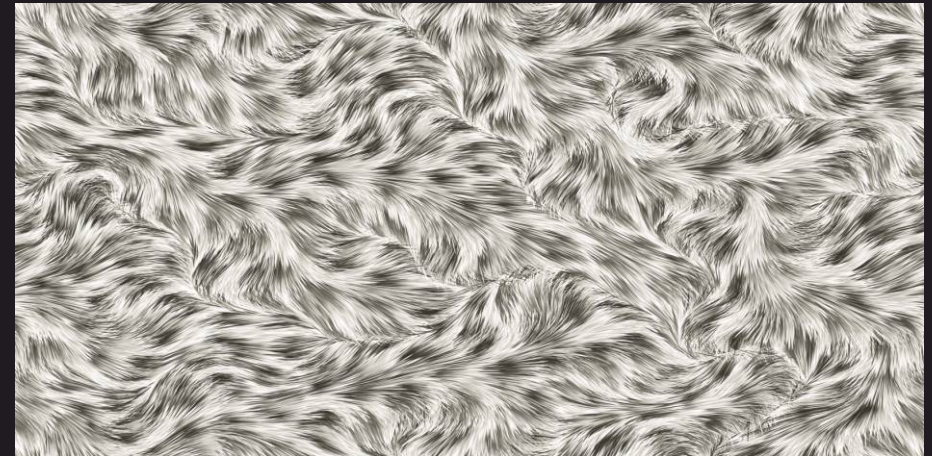

600x  
1200mm

GLOSSY FINISH








GVT / PGVT







42197



600x  
1200mm

GLOSSY FINISH





-  High Strength
-  Eco Friendly
-  Random Design
-  Low Maintenance



GVT / PGVT




42201

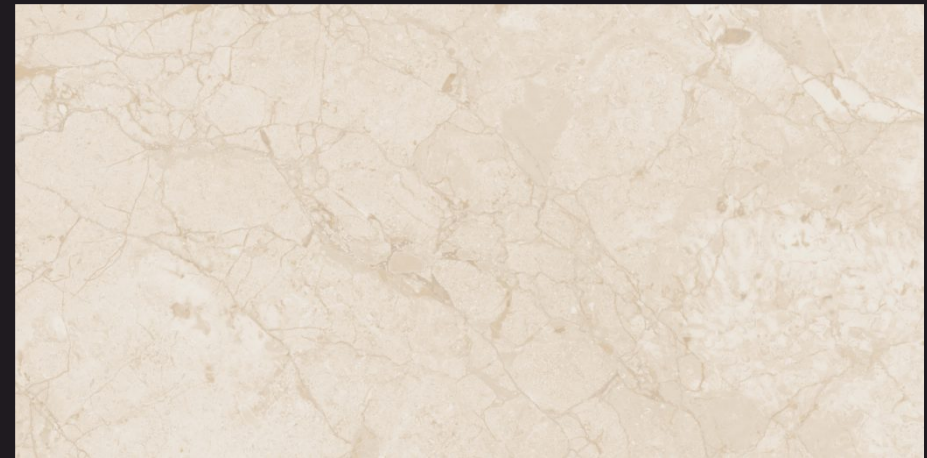

600x  
1200mm

GLOSSY FINISH






GVT / PGVT



42209



600x  
1200mm

GLOSSY FINISH



High  
Strength



Eco  
Friendly



Random  
Design







Low  
Maintenance



GVT / PGVT




42219

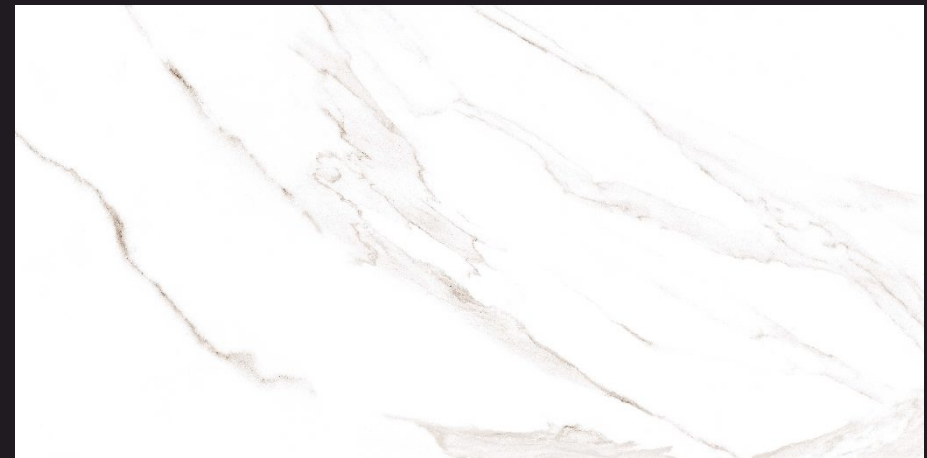

600x  
1200mm

GLOSSY FINISH





GVT / PGVT



42226



600x  
1200mm

GLOSSY FINISH








GVT / PGVT




42229

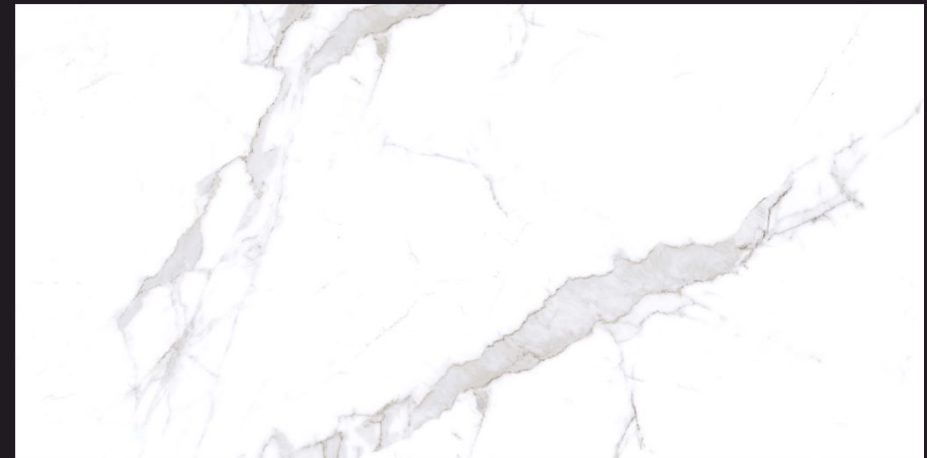

600x  
1200mm

GLOSSY FINISH








GVT / PGVT



42232



600x  
1200mm

GLOSSY FINISH



High  
Strength



Eco  
Friendly



Random  
Design





Low  
Maintenance



GVT / PGVT



42234



600x  
1200mm

GLOSSY FINISH









GVT / PGVT



42235

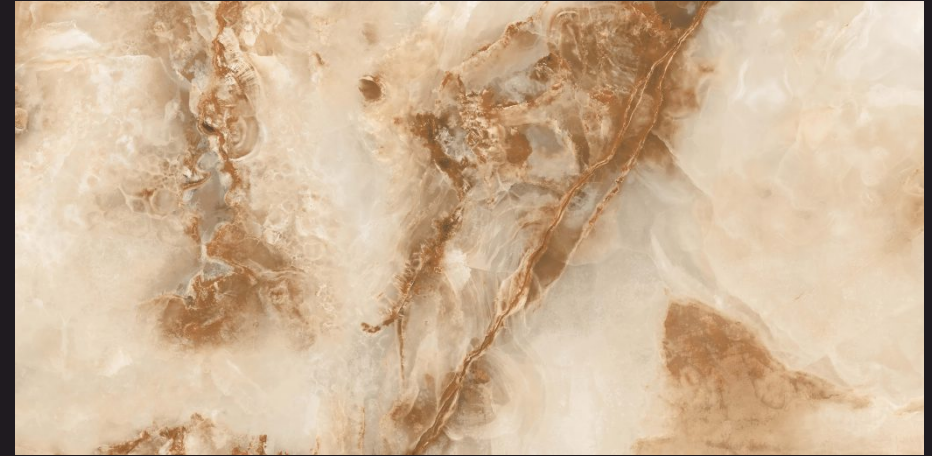

600x  
1200mm

GLOSSY FINISH



High  
Strength



Eco  
Friendly



Random  
Design



Low  
Maintenance

# TECHNICAL SPECIFICATION

CHARACTERISTIC	STANDARD AS PER ISO-13006/EN14411 GROUP BLA	MEAN VALUE OF PASSION	TEST METHOD
----------------	---	-----------------------	-------------

## REGULATORY PROPERTIES

Deviation in Length & Width	±0.5%	±0.1%	ISO-10545-2
Deviation in Thickness	±5.0%	±4.0%	ISO-10545-2
Straightness in Side	±0.5%	±0.1%	ISO-10545-2
Rectangularity	±0.5%	±0.1%	ISO-10545-2
Surface Flatness	±0.5%	±0.2%	ISO-10545-2
Color Difference	Unaltered	No Change	ISO-10545-16
Glossiness (ONLY FOR PGVT)	As Per Mfg.	Min 90%	GLOSSMETER

## STRUCTURAL PROPERTIES

Water Absorption	< 0.50%	< 0.05%	ISO-10545-3
Apparent Density	> 2.0 g/cc	> 2.10 g/cc	DIN 51082

## MASSIVE MECHANICAL PROPERTIES

Modulus of Rupture	Min. 35 N/mm <sup>2</sup>	Min. 40 N/mm <sup>2</sup>	ISO-10545-4
Breaking Strength	Min. 1300 N	Min. 2000 N	ISO-10545-4
Impact Resistance	As Per Mfg.	Min. 0.55	ISO-10545-5

## SURFACE MECHANICAL PROPERTIES

Surface Abrasion Resistance	As Per Mfg.	Min. Class-3	ISO-10545-7
MOH's Hardness	As Per Mfg.	Min. 4	EN 101

## THERMO HYGROMETRIC PROPERTIES

Frost Resistance	No Damage	No Damage	ISO-10545-12
Thermal Shock Resistance	No Damage	No Damage	ISO-10545-09
Moisture Expansion	Nil	Nil	ISO-10545-10
Thermal Expansion (COE)	Max. 9.0 x 10 <sup>-6</sup>	Max. 6.5 x 10 <sup>-6</sup>	ISO-10545-8
Crazing Resistance	As Per Mfg.	Min. 10 Cycle	ISO-10545-11

## CHEMICAL PROPERTIES

Chemical Resistance	No Damage	No Damage	ISO-10545-13
Stain Resistance	Resistance	Resistance	ISO-10545-14

## SAFETY PROPERTIES

Slip Resistance	As Per Mfg.	> 0.40	ISO-10545-17
Fire Resistance	As Per Mfg.	Fireproof	N. A.
Lead & Cadmium Given Off By Glazed Tiles	As Per Mfg.	Does Not Yield Pb & Cd	ISO-10545-15

# PACKING DETAILS

DIMENSION	THICKNESS	PCS/BOX	COVERAGE AREA	BOX WEIGHT
600 X 1200 MM	9 MM (APPROX)	2	1.44 SQM.	29 KG ( APPROX)

**DISCLAIMER:** We tiles reserve the right to deleted and amend either totally or partially, any of the colors, shape, sizes, references and other technical specification contained in this catalogue at anytime. The colors shown of tiles in this catalogue are purely illustrative and limited to printing process. Please refer actual sample before final selection. The details of sizes, colors, references should be verified for typographical errors.



**PASSION VITRIFIED PVT. LTD.**

Survey No. 223/P1,  
Sartanpar Road, Near Matel,  
Ta. Wankaner - 363621, Dist: Morbi, Gujarat, India.

T. - +91 99250 34828  
E. - [marketing@passiontiles.com](mailto:marketing@passiontiles.com)  
w. - [www.passiontiles.com](http://www.passiontiles.com)