





GVT / PGVT



42261



600x
1200mm

GLOSSY FINISH



High
Strength



Eco
Friendly



Random
Design





Low
Maintenance



GVT / PGVT



42262



600x
1200mm

GLOSSY FINISH



High
Strength



Eco
Friendly



Random
Design




Low
Maintenance



GVT / PGVT



42263

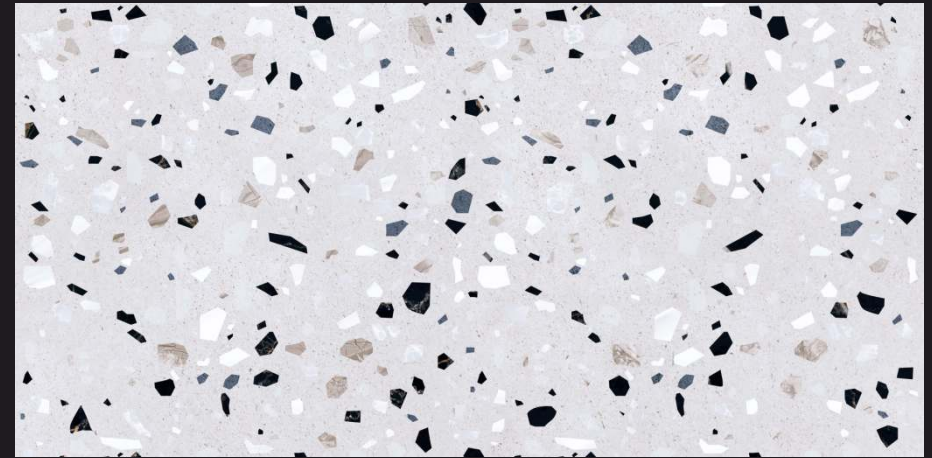

600x
1200mm

GLOSSY FINISH



High
Strength



Eco
Friendly



Random
Design




Low
Maintenance



GVT / PGVT



42264

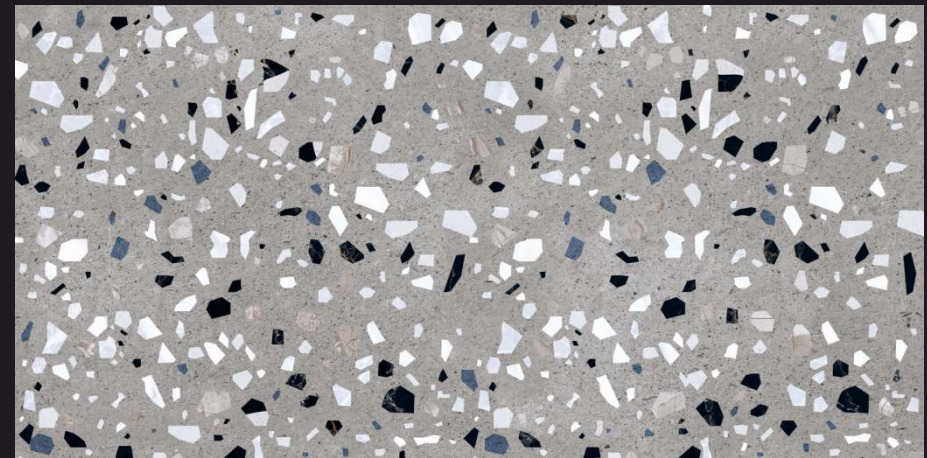

600x
1200mm

GLOSSY FINISH



High
Strength



Eco
Friendly



Random
Design



Low
Maintenance



GVT / PGVT



42265



600x
1200mm

GLOSSY FINISH



High
Strength



Eco
Friendly



Random
Design



Low
Maintenance



GVT / PGVT



42266



600x
1200mm

GLOSSY FINISH





GVT / PGVT



42267



600x
1200mm

GLOSSY FINISH



High
Strength



Eco
Friendly



Random
Design




Low
Maintenance



GVT / PGVT



42268

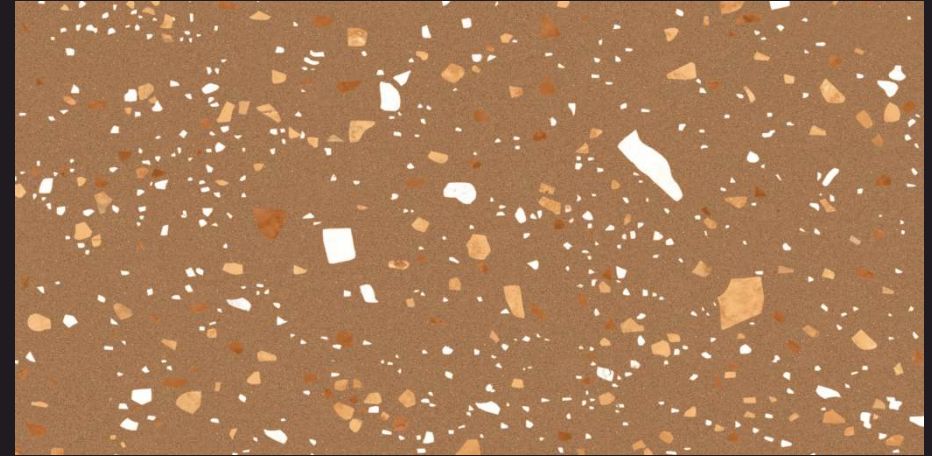

600x
1200mm

GLOSSY FINISH



High
Strength



Eco
Friendly



Random
Design



Low
Maintenance



GVT / PGVT




42269



600x
1200mm

GLOSSY FINISH





GVT / PGVT




42270



600x
1200mm

GLOSSY FINISH








GVT / PGVT



42271

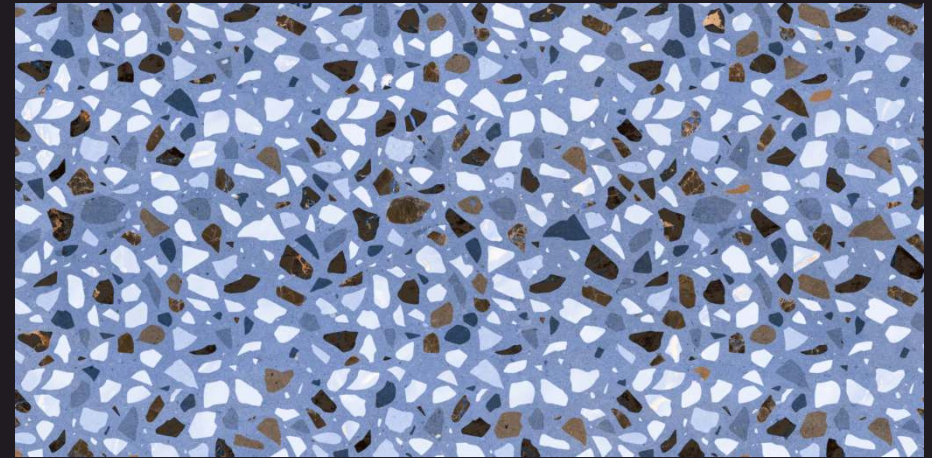

600x
1200mm

GLOSSY FINISH



High
Strength



Eco
Friendly



Random
Design





Low
Maintenance



GVT / PGVT




42272

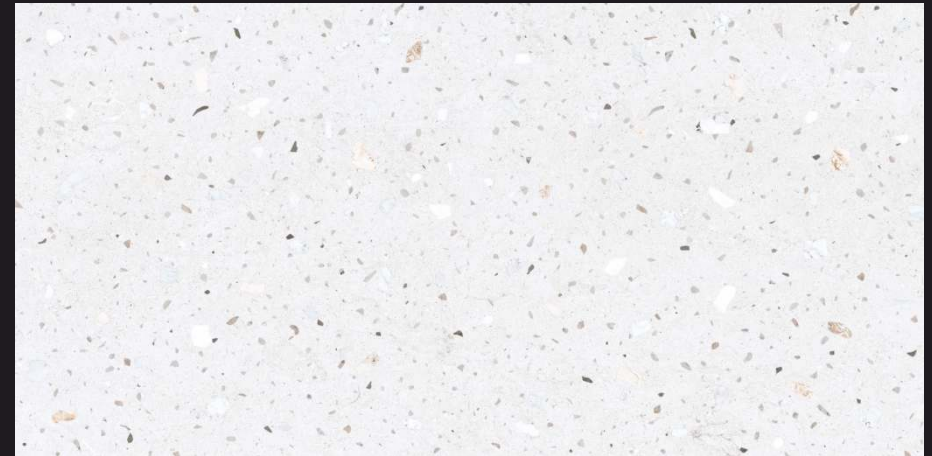

600x
1200mm

GLOSSY FINISH






GVT / PGVT




42273



600x
1200mm

GLOSSY FINISH






GVT / PGVT




42274



600x
1200mm

GLOSSY FINISH






GVT / PGVT



42275

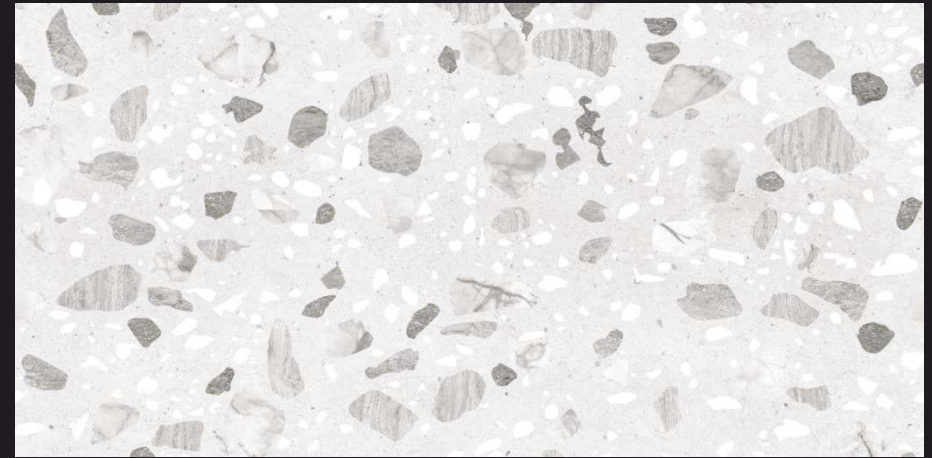

600x
1200mm

GLOSSY FINISH



High
Strength



Eco
Friendly



Random
Design







Low
Maintenance



GVT / PGVT



42276

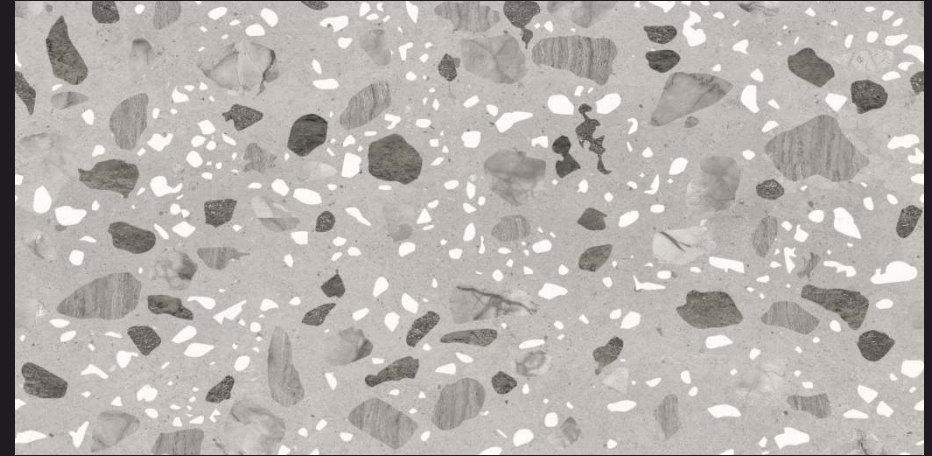

600x
1200mm

GLOSSY FINISH



High
Strength



Eco
Friendly



Random
Design




Low
Maintenance



GVT / PGVT




42277



600x
1200mm

GLOSSY FINISH









GVT / PGVT



42278

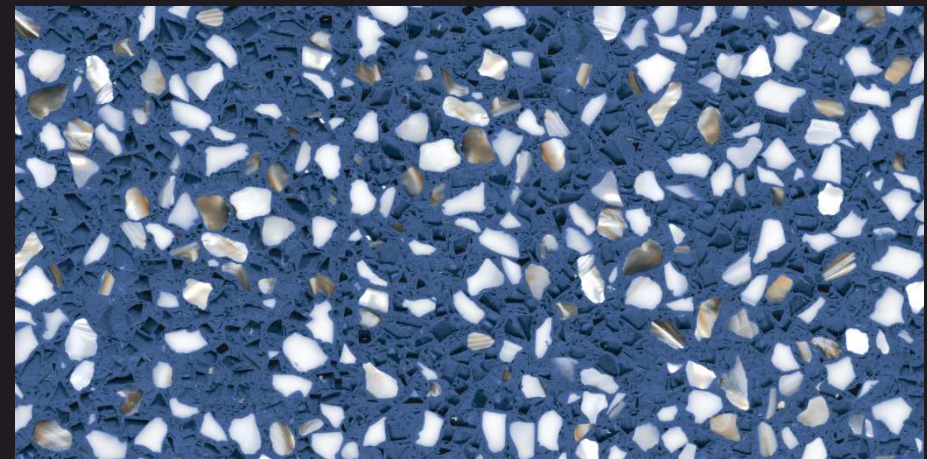

600x
1200mm

GLOSSY FINISH



High
Strength



Eco
Friendly



Random
Design





Low
Maintenance



GVT / PGVT



42279

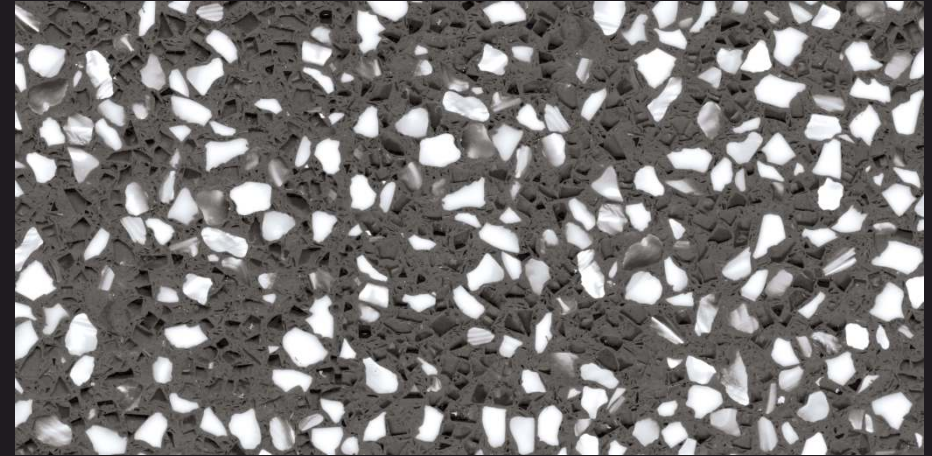

600x
1200mm

GLOSSY FINISH



High
Strength



Eco
Friendly



Random
Design




Low
Maintenance



GVT / PGVT



42280

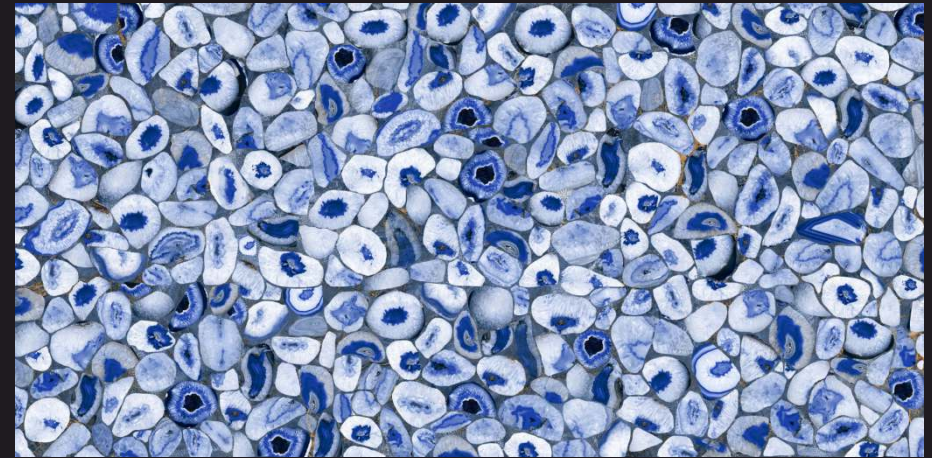

600x
1200mm

GLOSSY FINISH



High
Strength



Eco
Friendly



Random
Design



Low
Maintenance



GVT / PGVT



42281



600x
1200mm

GLOSSY FINISH



High
Strength



Eco
Friendly



Random
Design




Low
Maintenance



GVT / PGVT



42282



GLOSSY FINISH



High
Strength



Eco
Friendly



Random
Design



Low
Maintenance



GVT / PGVT



42283



600x
1200mm

GLOSSY FINISH



High
Strength



Eco
Friendly



Random
Design





Low
Maintenance



GVT / PGVT



42284



600x
1200mm

GLOSSY FINISH



High
Strength



Eco
Friendly



Random
Design




Low
Maintenance



GVT / PGVT



42285

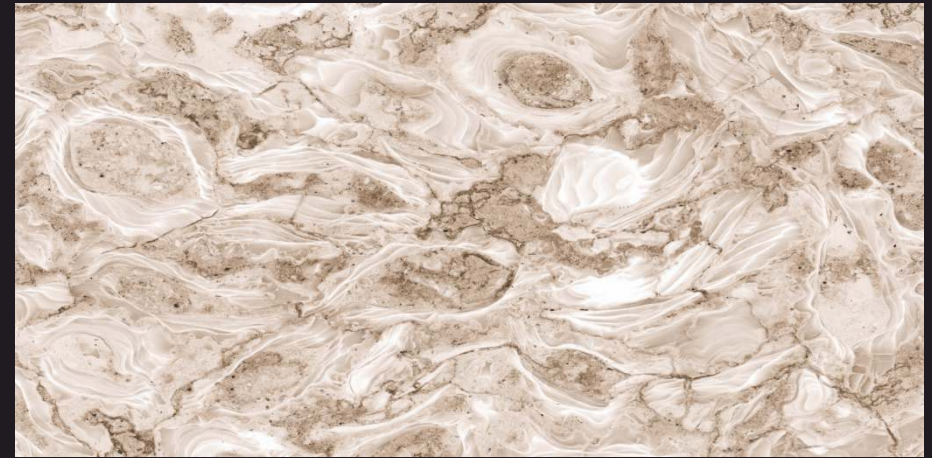

600x
1200mm

GLOSSY FINISH



High
Strength



Eco
Friendly



Random
Design






Low
Maintenance



GVT / PGVT




42286



600x
1200mm

GLOSSY FINISH







GVT / PGVT



42287



600x
1200mm

GLOSSY FINISH



High
Strength



Eco
Friendly



Random
Design



Low
Maintenance



GVT / PGVT




42288



600x
1200mm

GLOSSY FINISH





GVT / PGVT



42289



600x
1200mm

GLOSSY FINISH



High
Strength



Eco
Friendly



Random
Design



Low
Maintenance

TECHNICAL SPECIFICATION

CHARACTERISTIC	STANDARD AS PER ISO-13006/EN14411 GROUP BLA	MEAN VALUE OF PASSION	TEST METHOD
----------------	---	-----------------------	-------------

REGULATORY PROPERTIES

Deviation in Length & Width	±0.5%	±0.1%	ISO-10545-2
Deviation in Thickness	±5.0%	±4.0%	ISO-10545-2
Straightness in Side	±0.5%	±0.1%	ISO-10545-2
Rectangularity	±0.5%	±0.1%	ISO-10545-2
Surface Flatness	±0.5%	±0.2%	ISO-10545-2
Color Difference	Unaltered	No Change	ISO-10545-16
Glossiness (ONLY FOR PGVT)	As Per Mfg.	Min 90%	GLOSSMETER

STRUCTURAL PROPERTIES

Water Absorption	< 0.50%	< 0.05%	ISO-10545-3
Apparent Density	> 2.0 g/cc	> 2.10 g/cc	DIN 51082

MASSIVE MECHANICAL PROPERTIES

Modulus of Rupture	Min. 35 N/mm ²	Min. 40 N/mm ²	ISO-10545-4
Breaking Strength	Min. 1300 N	Min. 2000 N	ISO-10545-4
Impact Resistance	As Per Mfg.	Min. 0.55	ISO-10545-5

SURFACE MECHANICAL PROPERTIES

Surface Abrasion Resistance	As Per Mfg.	Min. Class-3	ISO-10545-7
MOH's Hardness	As Per Mfg.	Min. 4	EN 101

THERMO HYGROMETRIC PROPERTIES

Frost Resistance	No Damage	No Damage	ISO-10545-12
Thermal Shock Resistance	No Damage	No Damage	ISO-10545-09
Moisture Expansion	Nil	Nil	ISO-10545-10
Thermal Expansion (COE)	Max. 9.0 x 10 ⁻⁶	Max. 6.5 x 10 ⁻⁶	ISO-10545-8
Crazing Resistance	As Per Mfg.	Min. 10 Cycle	ISO-10545-11

CHEMICAL PROPERTIES

Chemical Resistance	No Damage	No Damage	ISO-10545-13
Stain Resistance	Resistance	Resistance	ISO-10545-14

SAFETY PROPERTIES

Slip Resistance	As Per Mfg.	> 0.40	ISO-10545-17
Fire Resistance	As Per Mfg.	Fireproof	N. A.
Lead & Cadmium Given Off By Glazed Tiles	As Per Mfg.	Does Not Yield Pb & Cd	ISO-10545-15

PACKING DETAILS

DIMENSION	THICKNESS	PCS/BOX	COVERAGE AREA	BOX WEIGHT
600 X 1200 MM	9 MM (APPROX)	2	1.44 SQM.	29 KG (APPROX)

DISCLAIMER: We tiles reserve the right to deleted and amend either totally or partially, any of the colors, shape, sizes, references and other technical specification contained in this catalogue at anytime. The colors shown of tiles in this catalogue are purely illustrative and limited to printing process. Please refer actual sample before final selection. The details of sizes, colors, references should be verified for typographical errors.



PASSION VITRIFIED PVT. LTD.

Survey No. 223/P1,
Sartanpar Road, Near Matel,
Ta. Wankaner - 363621, Dist: Morbi, Gujarat, India.

T. - +91 99250 34828
E. - marketing@passiontiles.com
w. - www.passiontiles.com