




GVT / PGVT




48001

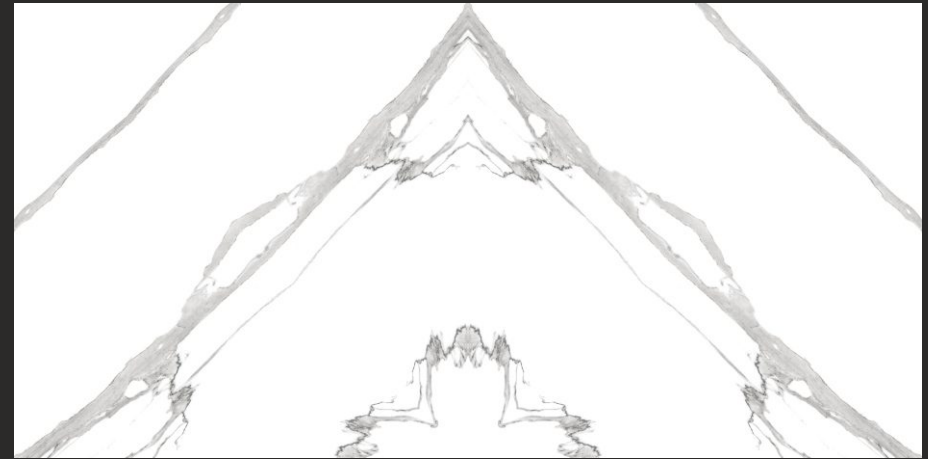

600x
1200mm

BOOK MATCH





GVT / PGVT




48002



600x
1200mm

BOOK MATCH







GVT / PGVT



48003



BOOK MATCH





GVT / PGVT




48004



600x
1200mm

BOOK MATCH








GVT / PGVT



48005

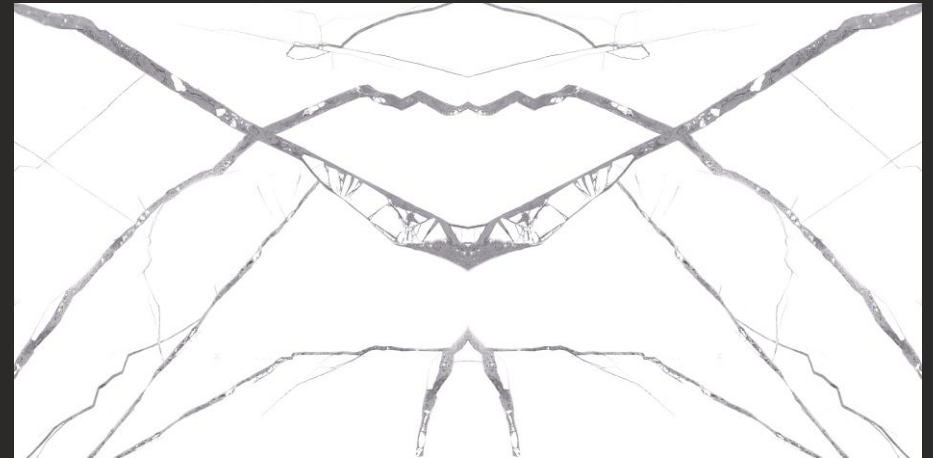

BOOK MATCH








GVT / PGVT



48006

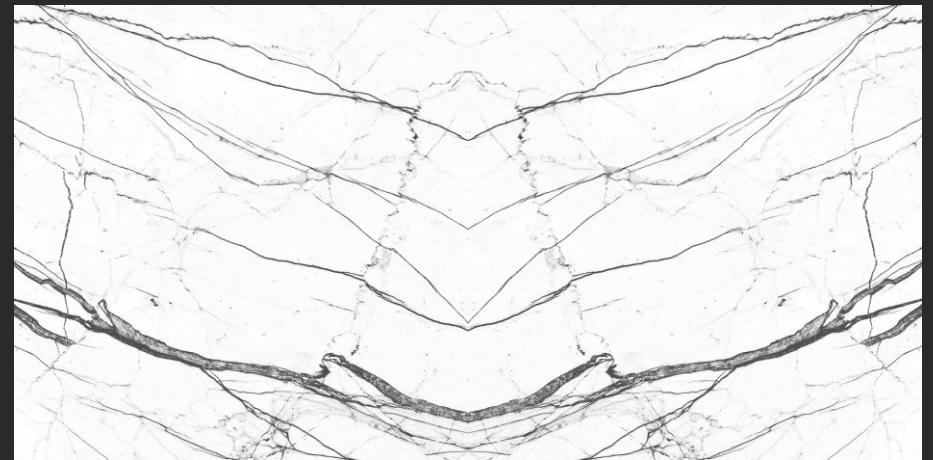

BOOK MATCH








GVT / PGVT



48007

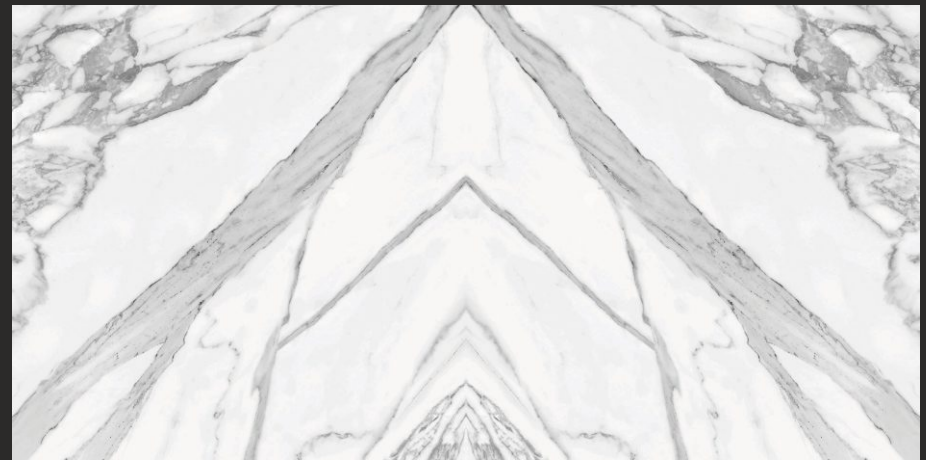

BOOK MATCH







GVT / PGVT



48008

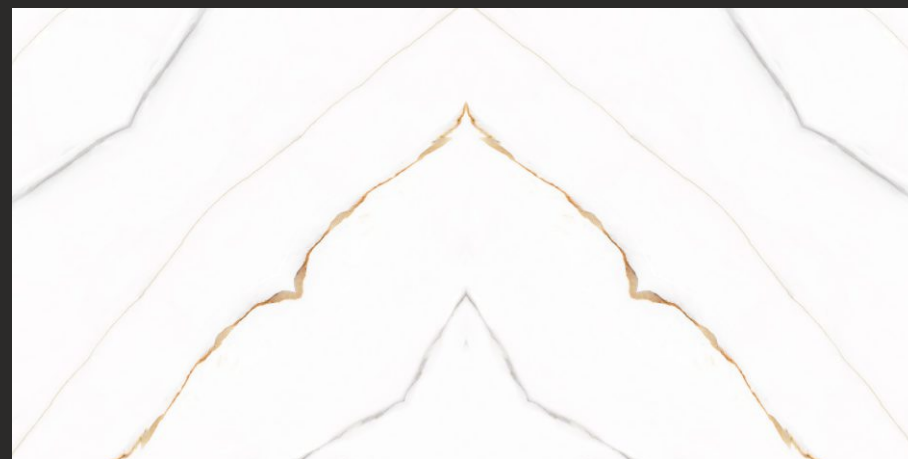

BOOK MATCH







GVT / PGVT



48009



BOOK MATCH








GVT / PGVT



48010

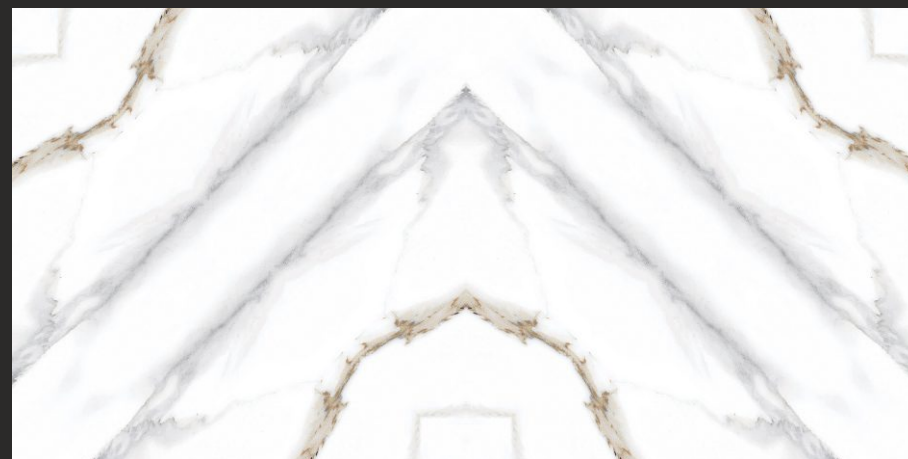

BOOK MATCH







GVT / PGVT



48011

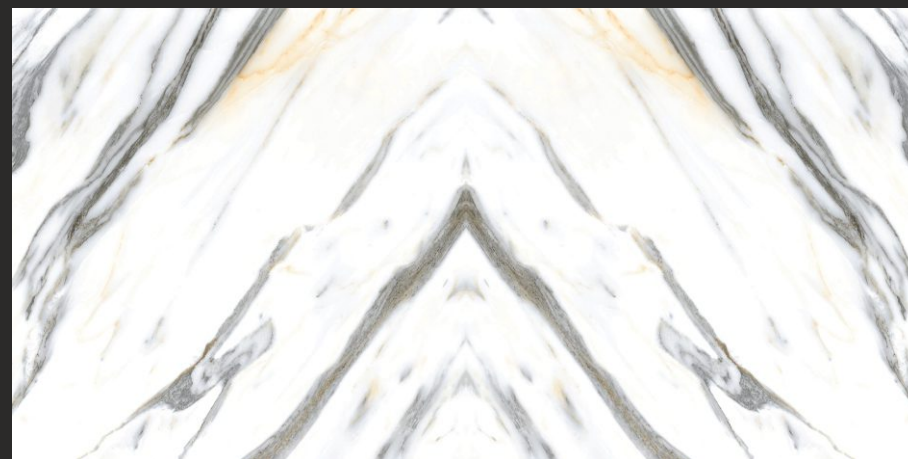

BOOK MATCH








GVT / PGVT



48012

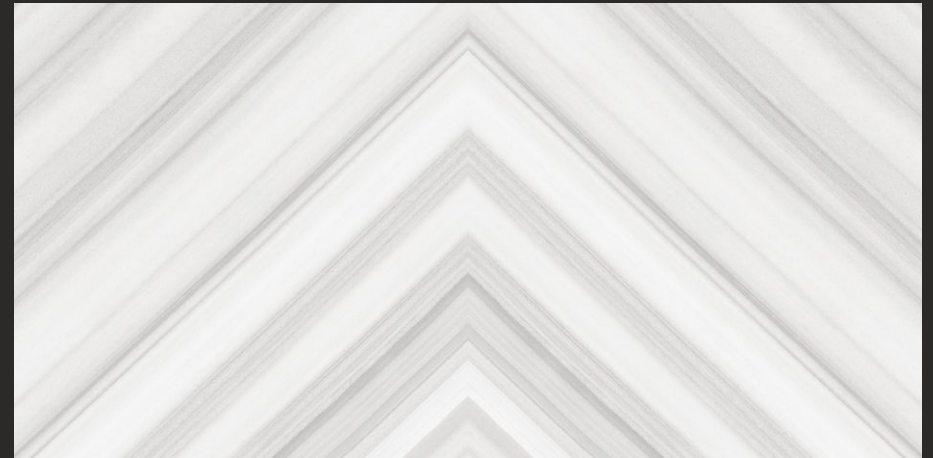

BOOK MATCH






GVT / PGVT




48013

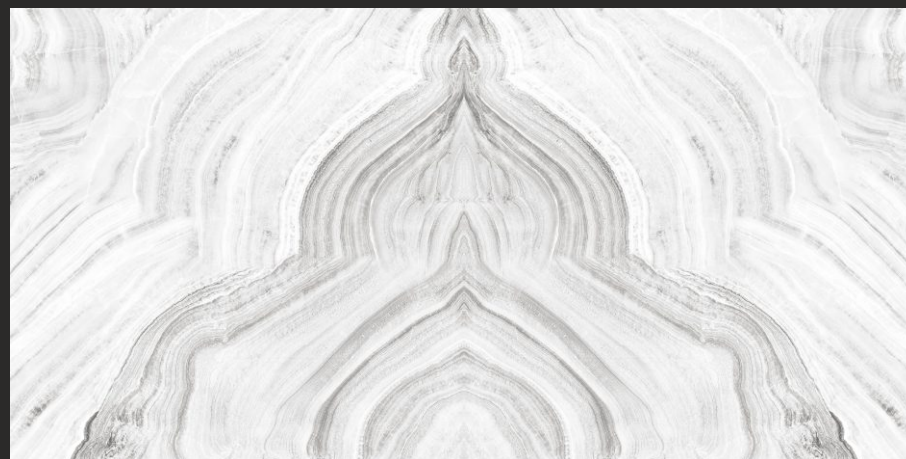

600x
1200mm

BOOK MATCH






GVT / PGVT




48014

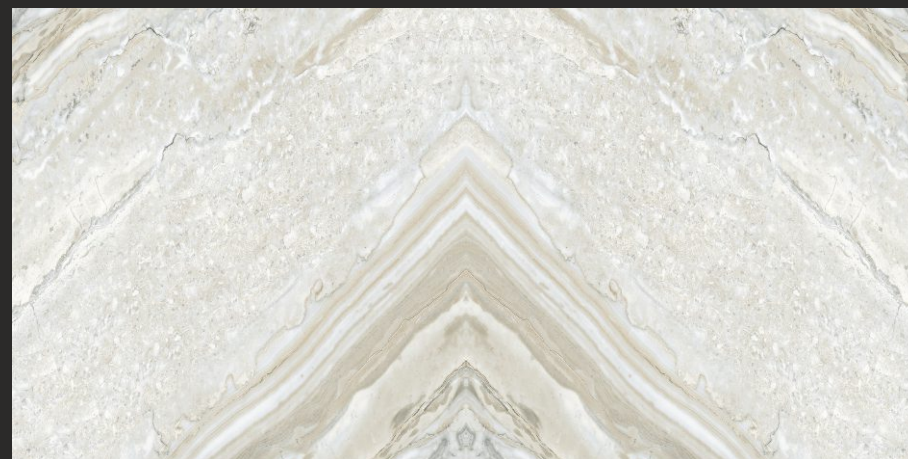

600x
1200mm

BOOK MATCH





GVT / PGVT




48015



600x
1200mm

BOOK MATCH






GVT / PGVT




48016

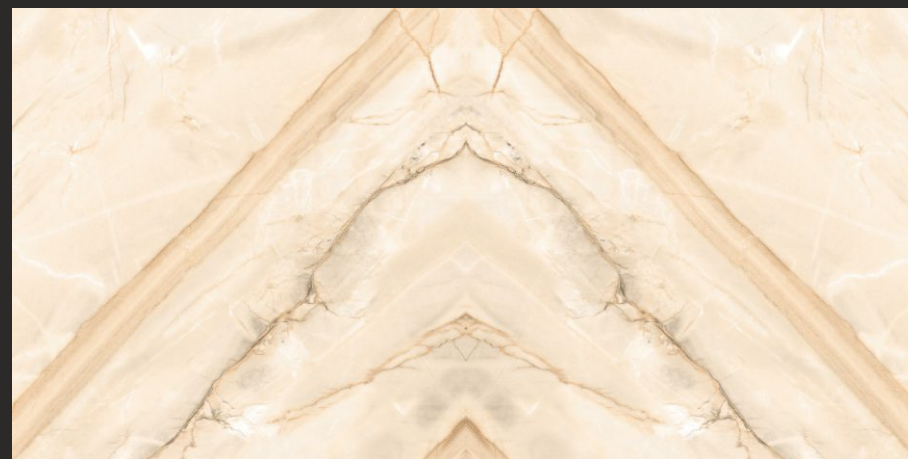

600x
1200mm

BOOK MATCH







GVT / PGVT



48017



BOOK MATCH





GVT / PGVT




48018



600x
1200mm

BOOK MATCH






GVT / PGVT




48019

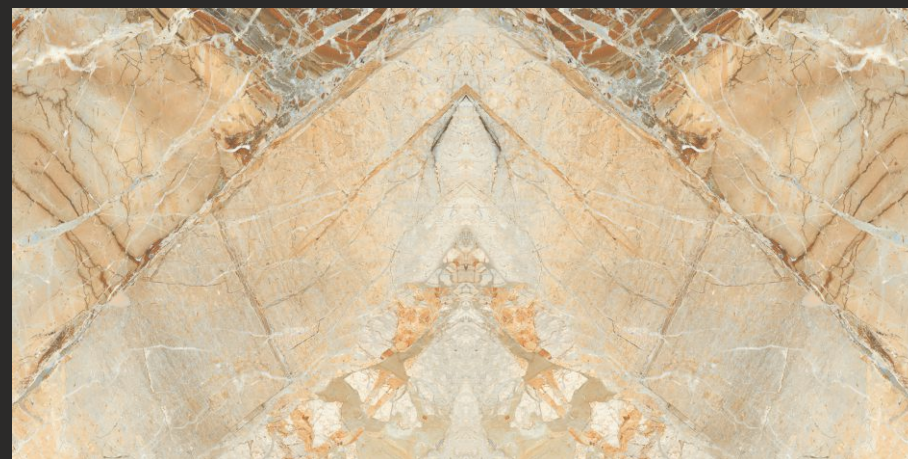

600x
1200mm

BOOK MATCH





GVT / PGVT




48020



600x
1200mm

BOOK MATCH





GVT / PGVT




48021



600x
1200mm

BOOK MATCH






GVT / PGVT




48022

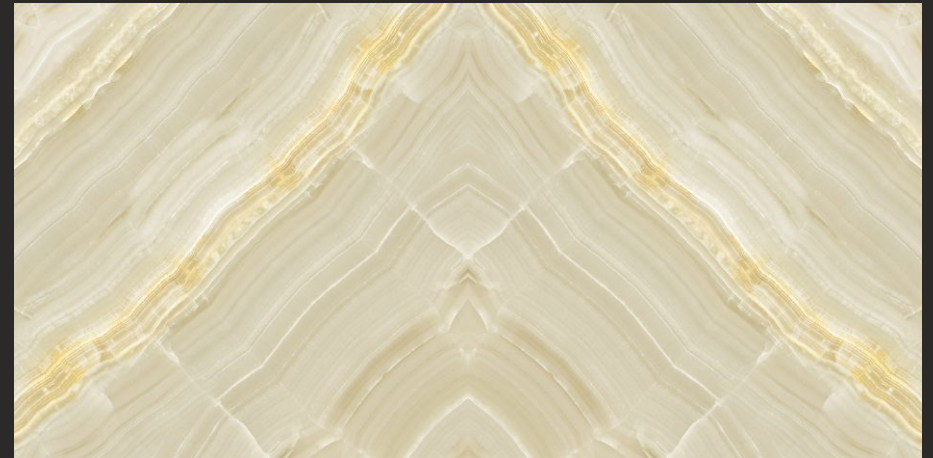

600x
1200mm

BOOK MATCH







GVT / PGVT



48023



BOOK MATCH





GVT / PGVT




48024



600x
1200mm

BOOK MATCH







GVT / PGVT



48025



BOOK MATCH





GVT / PGVT




48026



600x
1200mm

BOOK MATCH






GVT / PGVT




48027

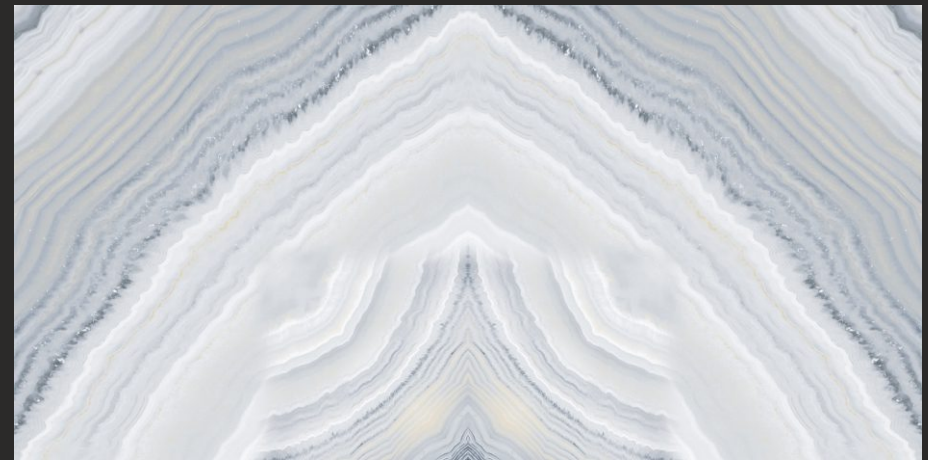

600x
1200mm

BOOK MATCH




High Strength Eco Friendly Random Design Low Maintenance




GVT / PGVT



48028



BOOK MATCH








GVT / PGVT



48029

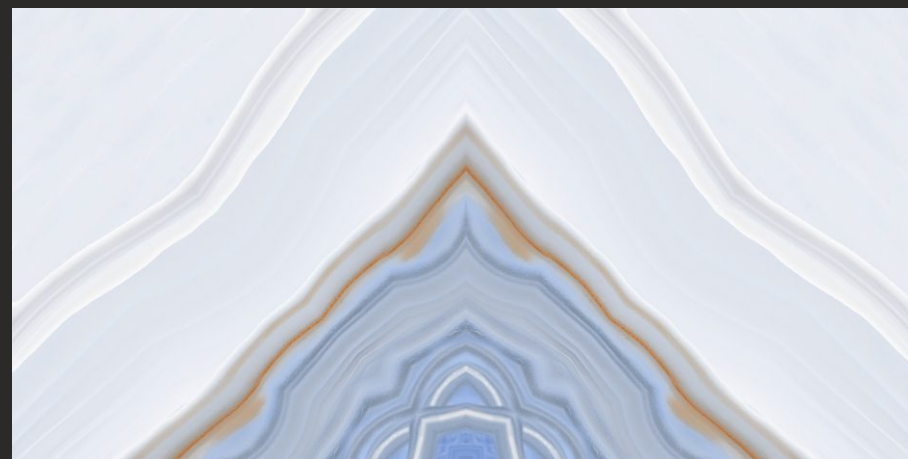

BOOK MATCH







GVT / PGVT



48030



BOOK MATCH





GVT / PGVT




48031



600x
1200mm

BOOK MATCH






GVT / PGVT




48032

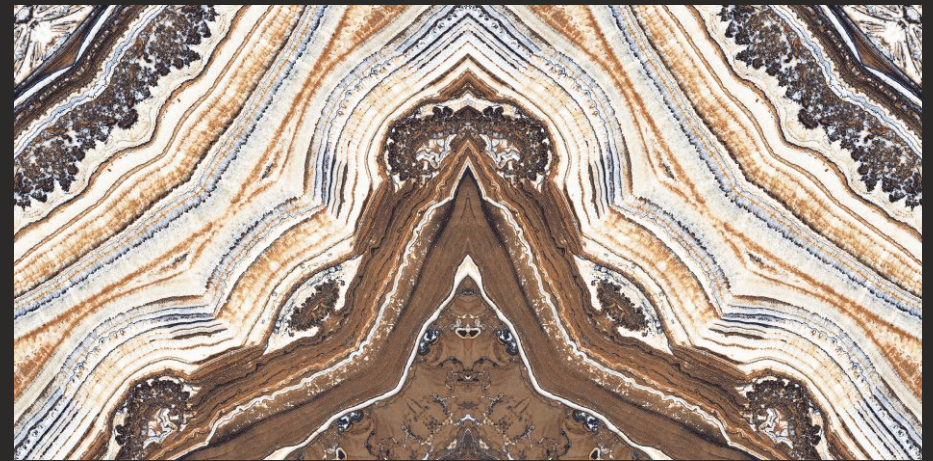

600x
1200mm

BOOK MATCH






GVT / PGVT




48033

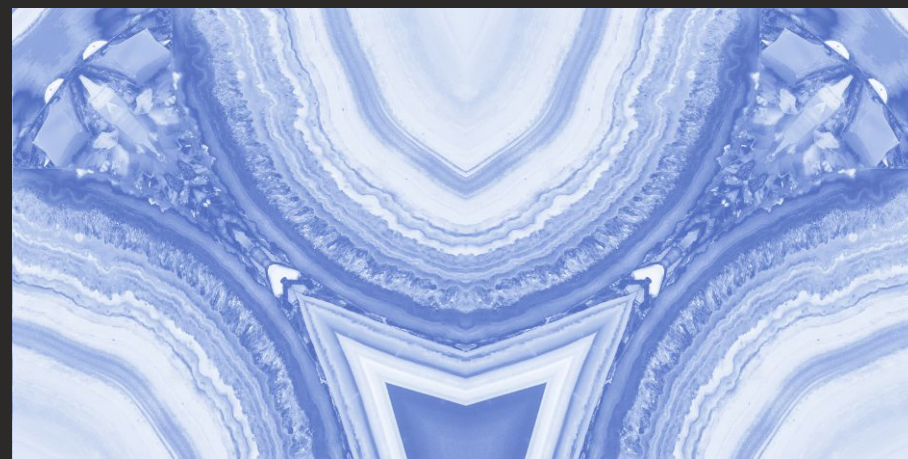

600x
1200mm

BOOK MATCH






GVT / PGVT




48034

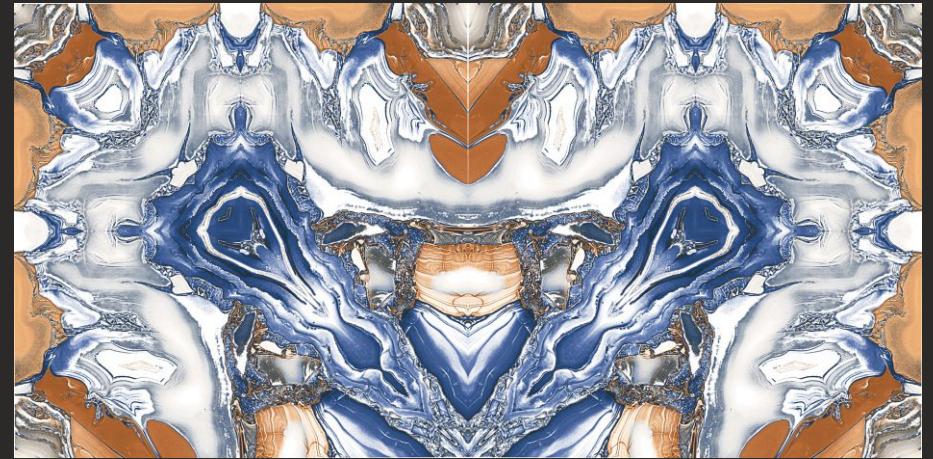

600x
1200mm

BOOK MATCH







GVT / PGVT



48035



BOOK MATCH







GVT / PGVT



48036



BOOK MATCH



TECHNICAL SPECIFICATION

CHARACTERISTIC	STANDARD AS PER ISO-13006/EN14411 GROUP BLA	MEAN VALUE OF PASSION	TEST METHOD
----------------	---	-----------------------	-------------

REGULATORY PROPERTIES

Deviation in Length & Width	±0.5%	±0.1%	ISO-10545-2
Deviation in Thickness	±5.0%	±4.0%	ISO-10545-2
Straightness in Side	±0.5%	±0.1%	ISO-10545-2
Rectangularity	±0.5%	±0.1%	ISO-10545-2
Surface Flatness	±0.5%	±0.2%	ISO-10545-2
Color Difference	Unaltered	No Change	ISO-10545-16
Glossiness (ONLY FOR PGVT)	As Per Mfg.	Min 90%	GLOSSMETER

STRUCTURAL PROPERTIES

Water Absorption	< 0.50%	< 0.05%	ISO-10545-3
Apparent Density	> 2.0 g/cc	> 2.10 g/cc	DIN 51082

MASSIVE MECHANICAL PROPERTIES

Modulus of Rupture	Min. 35 N/mm ²	Min. 40 N/mm ²	ISO-10545-4
Breaking Strength	Min. 1300 N	Min. 2000 N	ISO-10545-4
Impact Resistance	As Per Mfg.	Min. 0.55	ISO-10545-5

SURFACE MECHANICAL PROPERTIES

Surface Abrasion Resistance	As Per Mfg.	Min. Class-3	ISO-10545-7
MOH's Hardness	As Per Mfg.	Min. 4	EN 101

THERMO HYGROMETRIC PROPERTIES

Frost Resistance	No Damage	No Damage	ISO-10545-12
Thermal Shock Resistance	No Damage	No Damage	ISO-10545-09
Moisture Expansion	Nil	Nil	ISO-10545-10
Thermal Expansion (COE)	Max. 9.0 x 10 ⁻⁶	Max. 6.5 x 10 ⁻⁶	ISO-10545-8
Crazing Resistance	As Per Mfg.	Min. 10 Cycle	ISO-10545-11

CHEMICAL PROPERTIES

Chemical Resistance	No Damage	No Damage	ISO-10545-13
Stain Resistance	Resistance	Resistance	ISO-10545-14

SAFETY PROPERTIES

Slip Resistance	As Per Mfg.	> 0.40	ISO-10545-17
Fire Resistance	As Per Mfg.	Fireproof	N. A.
Lead & Cadmium Given Off By Glazed Tiles	As Per Mfg.	Does Not Yield Pb & Cd	ISO-10545-15

PACKING DETAILS

DIMENSION	THICKNESS	PCS/BOX	COVERAGE AREA	BOX WEIGHT
600 X 1200 MM	9 MM (APPROX)	2	1.44 SQM.	29 KG (APPROX)

DISCLAIMER: We tiles reserve the right to deleted and amend either totally or partially, any of the colors, shape, sizes, references and other technical specification contained in this catalogue at anytime. The colors shown of tiles in this catalogue are purely illustrative and limited to printing process. Please refer actual sample before final selection. The details of sizes, colors, references should be verified for typographical errors.



PASSION VITRIFIED PVT. LTD.

Survey No. 223/P1,
Sartanpar Road, Near Matel,
Ta. Wankaner - 363621, Dist: Morbi, Gujarat, India.

T. - +91 99250 34828
E. - marketing@passiontiles.com
w. - www.passiontiles.com