

# BRAZILIAN

S E R I E S

A PRODUCT BY <sup>®</sup>









GVT / PGVT



42290



BRAZILIAN  
S E R I E S

GLOSSY FINISH



High  
Strength



Eco  
Friendly



Random  
Design



Low  
Maintenance









GVT / PGVT



42291

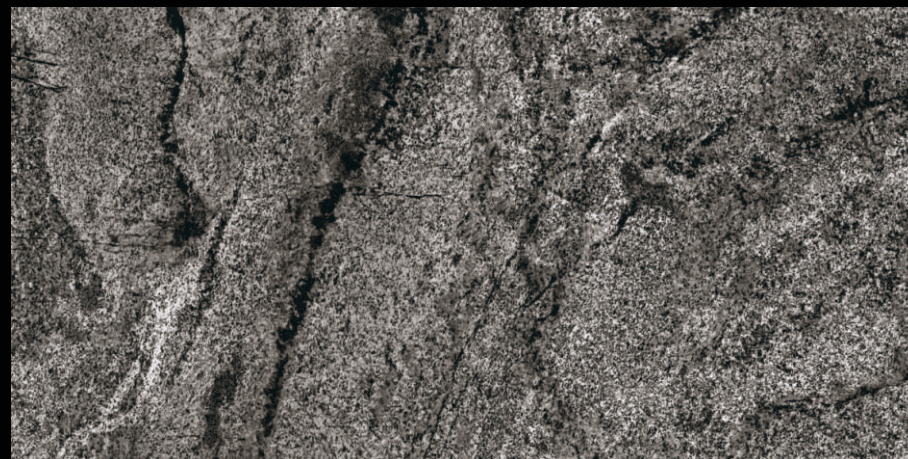

BRAZILIAN  
S E R I E S

GLOSSY FINISH



High  
Strength



Eco  
Friendly



Random  
Design



Low  
Maintenance










GVT / PGVT



42292

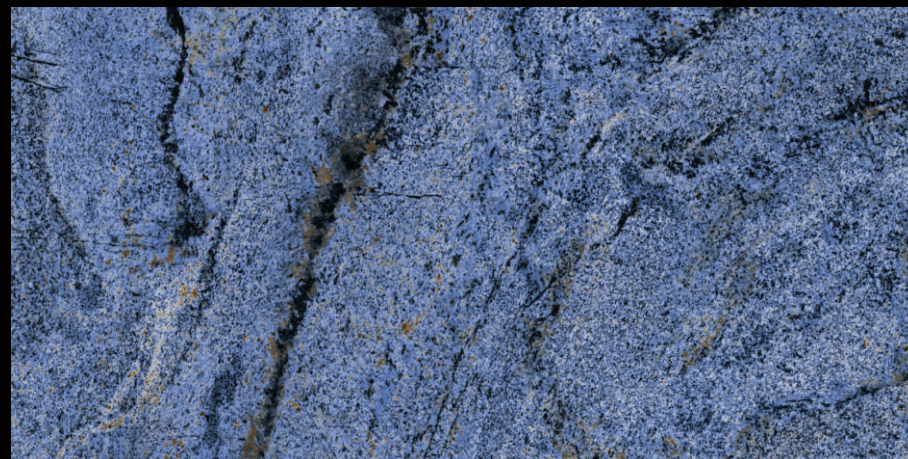

BRAZILIAN  
S E R I E S

GLOSSY FINISH











GVT / PGVT



42293

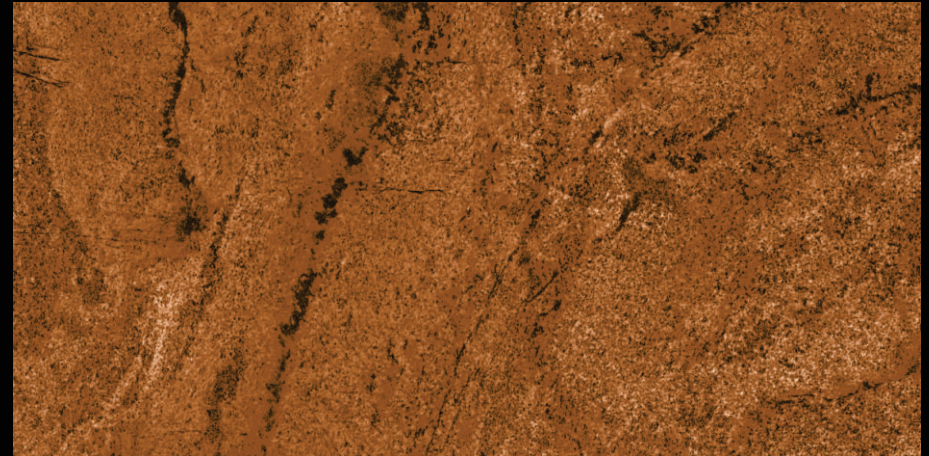

BRAZILIAN  
S E R I E S

GLOSSY FINISH



High  
Strength



Eco  
Friendly



Random  
Design



Low  
Maintenance





GVT / PGVT



42294



600x  
1200mm

BRAZILIAN  
S E R I E S

GLOSSY FINISH











GVT / PGVT



42295



BRAZILIAN  
S E R I E S

GLOSSY FINISH



High  
Strength



Eco  
Friendly



Random  
Design



Low  
Maintenance









GVT / PGVT



42296



BRAZILIAN  
S E R I E S

GLOSSY FINISH



High  
Strength



Eco  
Friendly



Random  
Design



Low  
Maintenance








GVT / PGVT



42297



BRAZILIAN  
S E R I E S

GLOSSY FINISH












GVT / PGVT



42298

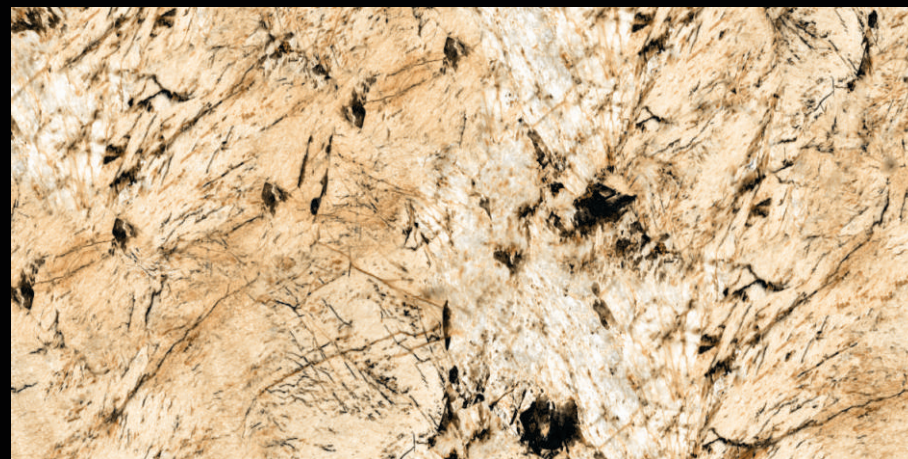

BRAZILIAN  
S E R I E S

GLOSSY FINISH



High  
Strength



Eco  
Friendly



Random  
Design



Low  
Maintenance










GVT / PGVT



42299

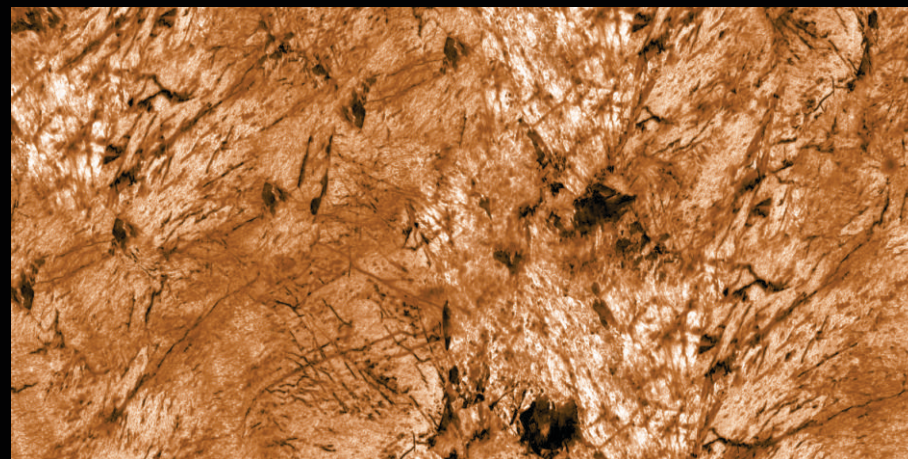

BRAZILIAN  
S E R I E S

GLOSSY FINISH










GVT / PGVT



42300

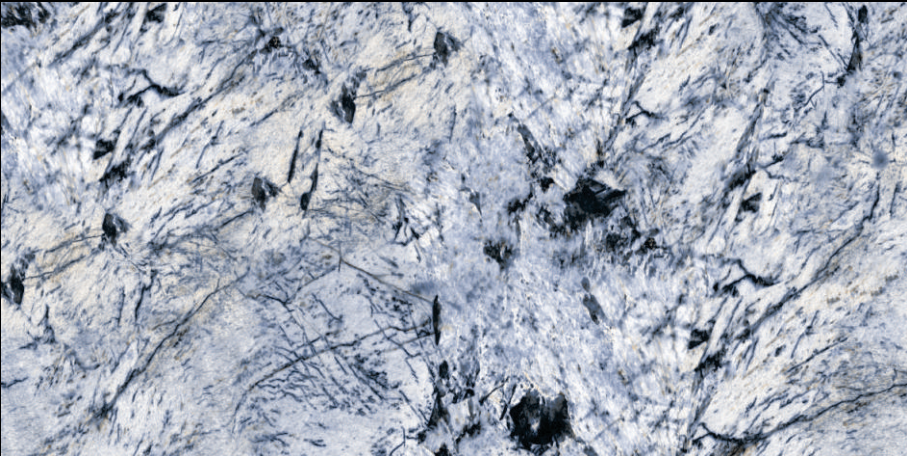

600x  
1200mm

BRAZILIAN  
S E R I E S

GLOSSY FINISH



High  
Strength



Eco  
Friendly



Random  
Design



Low  
Maintenance






GVT / PGVT



42301



BRAZILIAN  
S E R I E S

GLOSSY FINISH



High  
Strength



Eco  
Friendly



Random  
Design



Low  
Maintenance










GVT / PGVT



42302

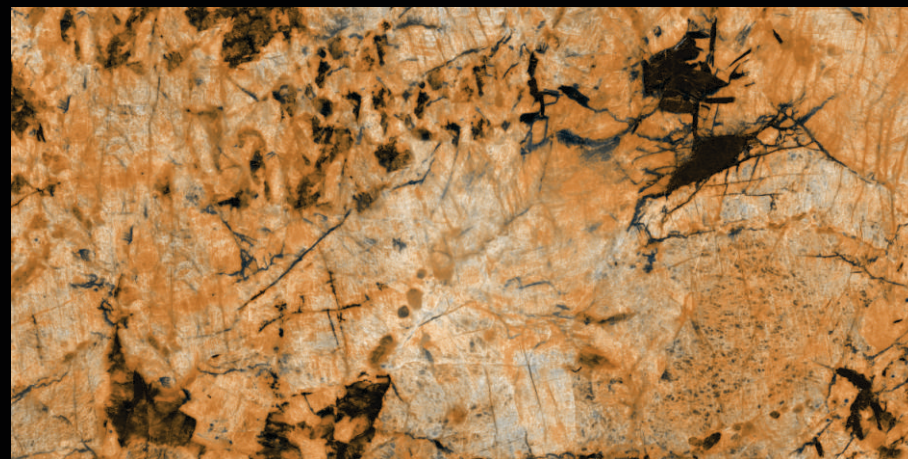

BRAZILIAN  
S E R I E S

GLOSSY FINISH



High  
Strength



Eco  
Friendly



Random  
Design



Low  
Maintenance








GVT / PGVT



42303

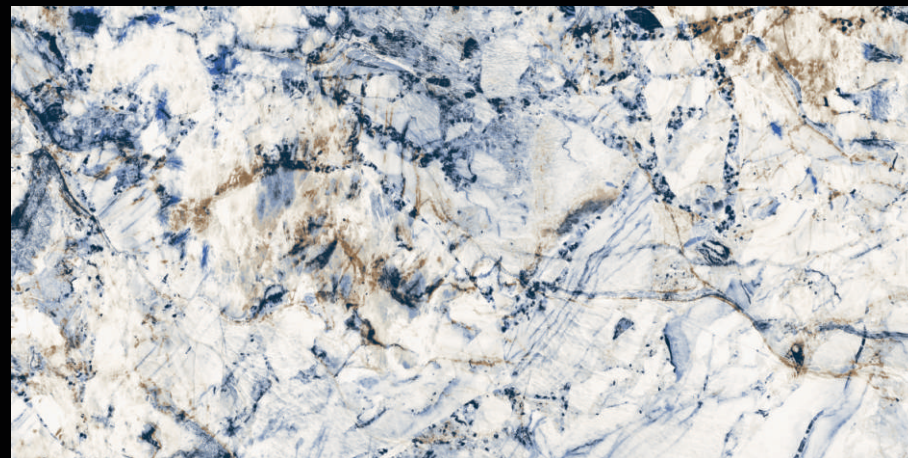

BRAZILIAN  
S E R I E S

GLOSSY FINISH








GVT / PGVT



42304



BRAZILIAN  
S E R I E S

GLOSSY FINISH



High  
Strength



Eco  
Friendly



Random  
Design



Low  
Maintenance










GVT / PGVT



42305

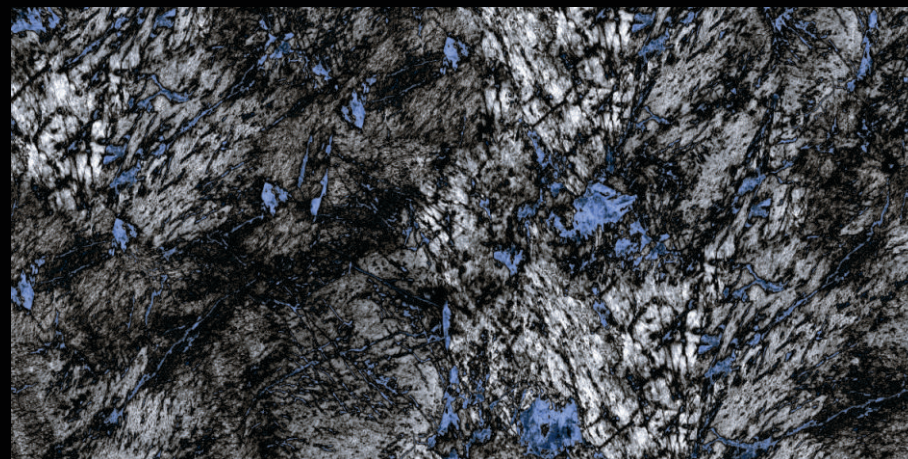

BRAZILIAN  
S E R I E S

GLOSSY FINISH












GVT / PGVT



42306

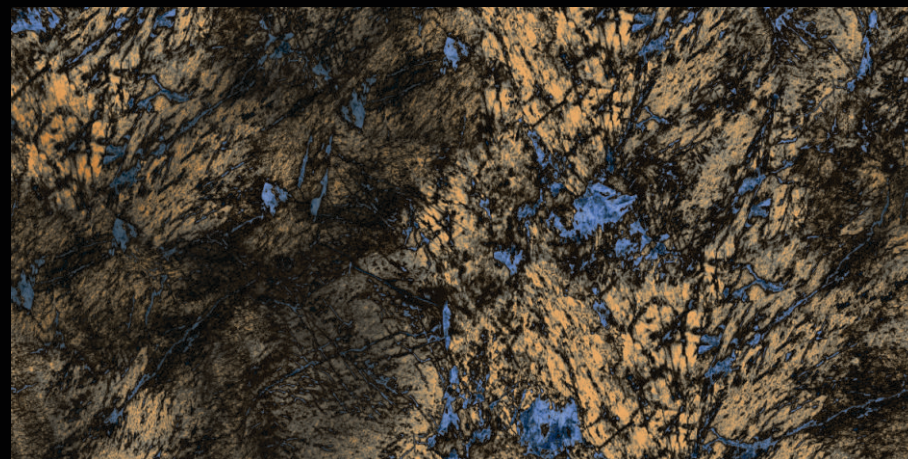

BRAZILIAN  
S E R I E S

GLOSSY FINISH












GVT / PGVT



42307

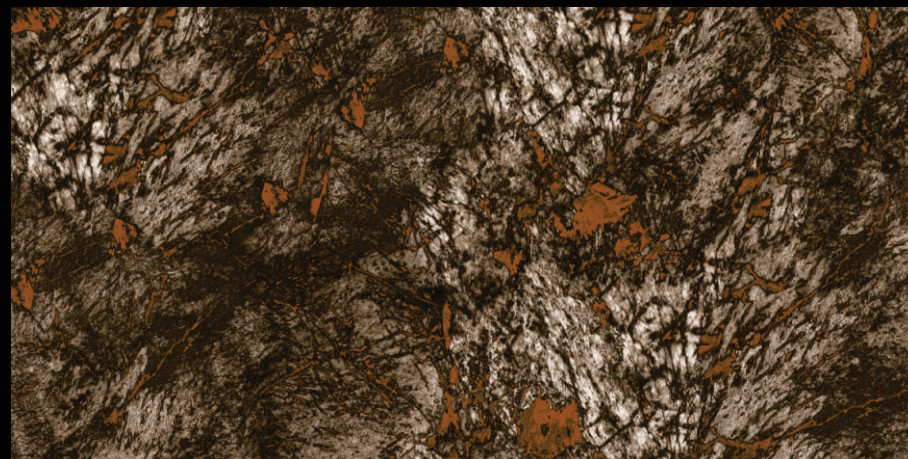

BRAZILIAN  
S E R I E S

GLOSSY FINISH



High  
Strength



Eco  
Friendly



Random  
Design



Low  
Maintenance









GVT / PGVT



42308



BRAZILIAN  
S E R I E S

GLOSSY FINISH



High  
Strength



Eco  
Friendly



Random  
Design



Low  
Maintenance







GVT / PGVT



42309



BRAZILIAN  
S E R I E S

GLOSSY FINISH



High  
Strength



Eco  
Friendly



Random  
Design



Low  
Maintenance










GVT / PGVT



42310

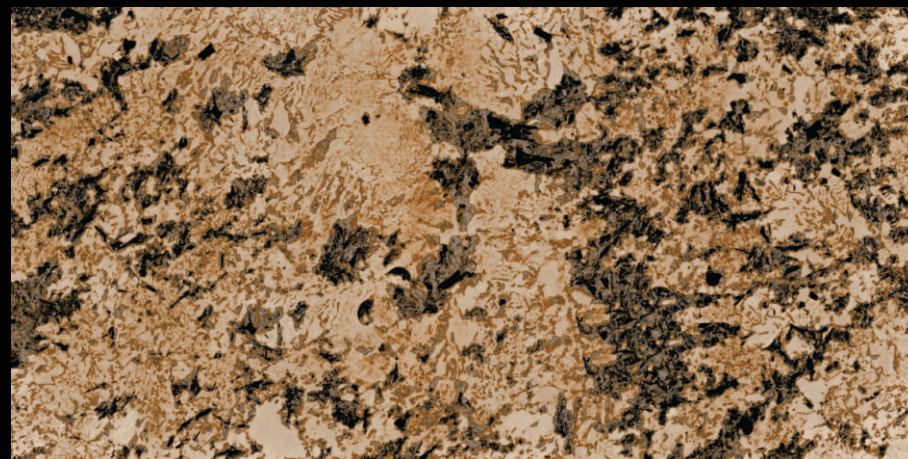

BRAZILIAN  
S E R I E S

GLOSSY FINISH



High  
Strength



Eco  
Friendly



Random  
Design



Low  
Maintenance









GVT / PGVT



42311

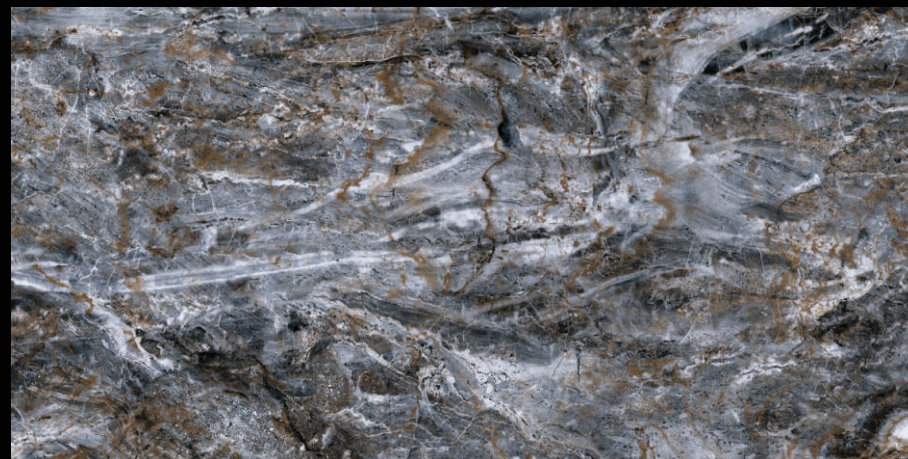

BRAZILIAN  
S E R I E S

GLOSSY FINISH



High  
Strength



Eco  
Friendly



Random  
Design



Low  
Maintenance










GVT / PGVT



42312

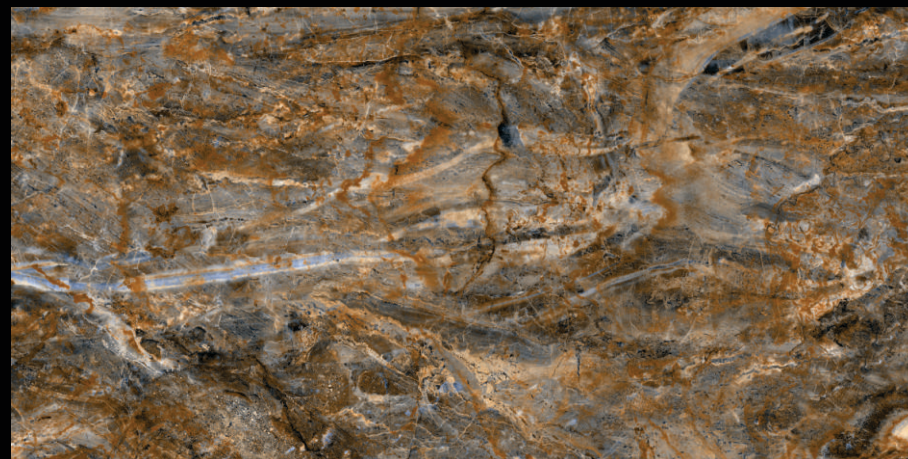

BRAZILIAN  
S E R I E S

GLOSSY FINISH












GVT / PGVT



42313

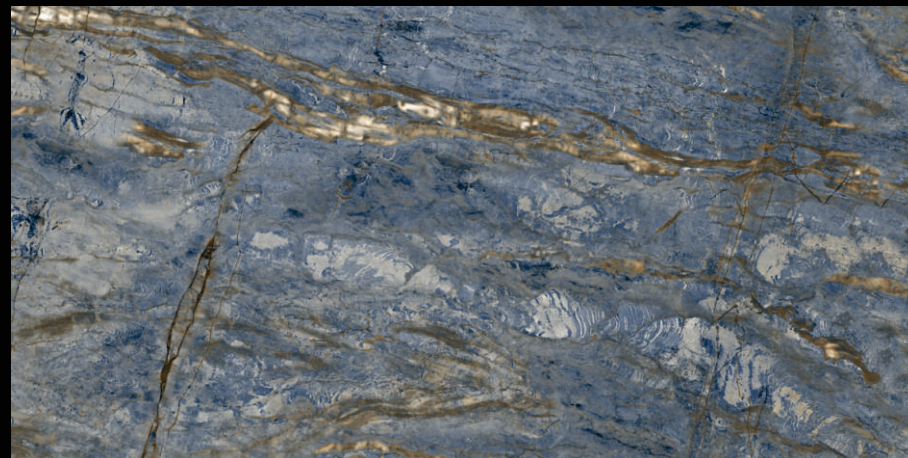

BRAZILIAN  
S E R I E S

GLOSSY FINISH



High  
Strength



Eco  
Friendly



Random  
Design



Low  
Maintenance



# TECHNICAL SPECIFICATION

| CHARACTERISTIC                           | STANDARD AS PER ISO-13006/EN14411 GROUP BLA | MEAN VALUE OF PASSION       | TEST METHOD  |
|------------------------------------------|---------------------------------------------|-----------------------------|--------------|
| REGULATORY PROPERTIES                    |                                             |                             |              |
| Deviation in Length & Width              | ±0.5%                                       | ±0.1%                       | ISO-10545-2  |
| Deviation in Thickness                   | ±5.0%                                       | ±4.0%                       | ISO-10545-2  |
| Straightness in Side                     | ±0.5%                                       | ±0.1%                       | ISO-10545-2  |
| Rectangularity                           | ±0.5%                                       | ±0.1%                       | ISO-10545-2  |
| Surface Flatness                         | ±0.5%                                       | ±0.2%                       | ISO-10545-2  |
| Color Difference                         | Unaltered                                   | No Change                   | ISO-10545-16 |
| Glossiness (ONLY FOR PGVT)               | As Per Mfg.                                 | Min 90%                     | GLOSSMETER   |
| STRUCTURAL PROPERTIES                    |                                             |                             |              |
| Water Absorption                         | < 0.50%                                     | < 0.05%                     | ISO-10545-3  |
| Apparent Density                         | > 2.0 g/cc                                  | > 2.10 g/cc                 | DIN 51082    |
| MASSIVE MECHANICAL PROPERTIES            |                                             |                             |              |
| Modulus of Rupture                       | Min. 35 N/mm <sup>2</sup>                   | Min. 40 N/mm <sup>2</sup>   | ISO-10545-4  |
| Breaking Strength                        | Min. 1300 N                                 | Min. 2000 N                 | ISO-10545-4  |
| Impact Resistance                        | As Per Mfg.                                 | Min. 0.55                   | ISO-10545-5  |
| SURFACE MECHANICAL PROPERTIES            |                                             |                             |              |
| Surface Abrasion Resistance              | As Per Mfg.                                 | Min. Class-3                | ISO-10545-7  |
| MOH's Hardness                           | As Per Mfg.                                 | Min. 4                      | EN 101       |
| THERMO HYGROMETRIC PROPERTIES            |                                             |                             |              |
| Frost Resistance                         | No Damage                                   | No Damage                   | ISO-10545-12 |
| Thermal Shock Resistance                 | No Damage                                   | No Damage                   | ISO-10545-09 |
| Moisture Expansion                       | Nil                                         | Nil                         | ISO-10545-10 |
| Thermal Expansion (coe)                  | Max. 9.0 x 10 <sup>-6</sup>                 | Max. 6.5 x 10 <sup>-6</sup> | ISO-10545-8  |
| Crazing Resistance                       | As Per Mfg.                                 | Min. 10 Cycle               | ISO-10545-11 |
| CHEMICAL PROPERTIES                      |                                             |                             |              |
| Chemical Resistance                      | No Damage                                   | No Damage                   | ISO-10545-13 |
| Stain Resistance                         | Resistance                                  | Resistance                  | ISO-10545-14 |
| SAFETY PROPERTIES                        |                                             |                             |              |
| Slip Resistance                          | As Per Mfg.                                 | > 0.40                      | ISO-10545-17 |
| Fire Resistance                          | As Per Mfg.                                 | Fireproof                   | N. A.        |
| Lead & Cadmium Given Off By Glazed Tiles | As Per Mfg.                                 | Does Not Yield Pb & Cd      | ISO-10545-15 |

# PACKING DETAILS

| DIMENSION     | THICKNESS     | PCS/BOX | COVERAGE AREA | BOX WEIGHT      |
|---------------|---------------|---------|---------------|-----------------|
| 600 X 1200 MM | 9 MM (APPROX) | 2       | 1.44 SQM.     | 30 KG ( APPROX) |

**DISCLAIMER :** We tiles reserve the right to deleted and amend either totally or partially, any of the colors, shape, sizes, references and other technical specification contained in this catalogue at anytime. The colors shown of tiles in this catalogue are purely illustrative and limited to printing process. Please refer actual sample before final selection. The details of sizes, colors, references should be verified for typographical errors.





**PASSION VITRIFIED PVT. LTD.**

Survey No. 223/P1,  
Sartanpar Road, Near Matel,  
Ta. Wankaner - 363621, Dist: Morbi, Gujarat, India.

T. - +91 99250 34828  
E. - [marketing@passiontiles.com](mailto:marketing@passiontiles.com)  
w. - [www.passiontiles.com](http://www.passiontiles.com)